

Vodafone 236 User Manual



Product Safety Information

Read the Safety Information section of this user guide on page 1	Do not use while re-fuelling
Do not use hand-held while driving	This device may produce a bright or flashing light
For body-worn operation maintain a separation of 15 mm	Do not dispose of it in a fire
Small parts may cause a choking hazard	Avoid contact with magnetic media
This device may produce a loud sound	Avoid Extreme Temperatures
Keep away from pacemakers and other personal medical devices	Avoid any contact with liquid, keep it dry
Switch off when instructed in hospitals and medical facilities	Do not attempt to disassemble
Switch off when instructed in aircrafts and airports	Do not rely on this device for emergency communications
Switch off in explosive environments	Only use approved accessories

- 1 -

RF Exposure

General Statement on RF Energy

Your phone contains a transmitter and a receiver. When it is ON, it receives and transmits RF energy. When you communicate with your phone, the system handling your call controls the power level at which your phone transmits.

Specific Absorption Rate (SAR)

Your mobile device is a radio transmitter and receiver. It is designed not to exceed the limits for exposure to radio waves recommended by international guidelines. These guidelines were developed by the independent scientific organisation ICNIRP and include safety margins designed to assure the protection of all persons, regardless of age and health.

The guidelines use a unit of measurement known as Specific Absorption Rate, or SAR. The SAR limit for mobile devices is 2.0 W/kg and the highest SAR value for this device when tested at the ear was 1.05 W/kg*. As mobile devices offer a range of functions, they can be used in other positions, such as on the body as described in this user guide**.

As SAR is measured utilising the device's highest transmitting power, the actual SAR of this device while operating is typically below that indicated above. This is due to automatic changes to the power level of the device to ensure it only uses the minimum power required to communicate with the network.

* The tests are carried out in accordance with IEC standard PT62209-1.

** Please see page 4 about body worn operation.

- 2 -

Body Worn Operation

Important safety information regarding radiofrequency radiation(RF) exposure.

To ensure compliance with RF exposure guidelines the phone must be used with a minimum of 15 mm separation from the body.

Failure to observe these instructions could result in your RF exposure exceeding the relevant guideline limits.

Limiting Exposure to Radio Frequency (RF) Fields

For individuals concerned about limiting their exposure to RF fields, the World Health Organisation (WHO) provides the following advice:

Precautionary measures: Present scientific information does not indicate the need for any special precautions for the use of mobile phones. If individuals are concerned, they might choose to limit their own or their children's RF exposure by limiting the length of calls, or using 'hands-free' devices to keep mobile phones away from the head and body.

Further information on this subject can be obtained from the WHO home page <http://www.who.int/peh-emf> WHO Fact sheet 193: June 2000.


Regulatory Information

The following approvals and notices apply in specific regions as noted.

The declaration for CE conformity and RoHS compliance can be read on page 25-26 and page 23.

- 3 -

Your phone

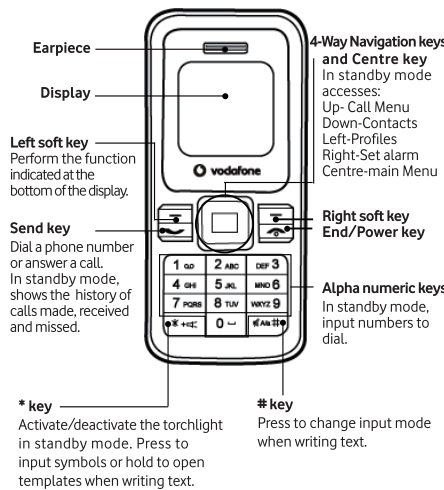

- 4 -

Interface icons


Icon	Description	Icon	Description
	Signal strength		Keypad locked
	Headset		Silent profile
	Vibration		Alarm clock set
	New message		Battery status

Battery

The lithium battery of the mobile phone can be immediately used after unpacking. A new battery performs best after performing a full charge/discharge 3 times.

Installing the battery


- Insert the battery by aligning the gold contacts on the battery with the gold contacts in the battery compartment on the phone.
- Push down on the upper section of the battery until it clicks into place.
- Replace the battery cover and press it gently until you hear a click.

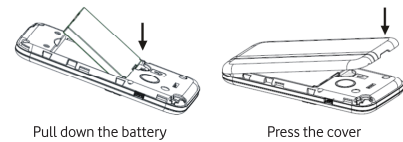

- 5 -

Removing the battery

- Ensure that your mobile phone is switched off.
- Remove the battery cover.
- Pull the battery up and remove it from the mobile phone.

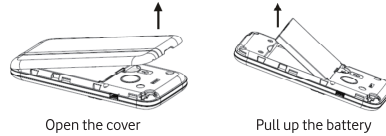


How to insert the SIM card

You want a mobile phone that is sophisticated yet easy to use and here it is in your hands! Naturally you are eager to start using it, but first you need to insert the SIM card. Insert the SIM card as follows:

- Ensure that the phone is switched off and the charger is disconnected from the phone.
- Turn the phone over and remove the back cover.
- If the battery is already inside, remove it!
- Hold your SIM card with the cut corner oriented as shown and then slide it into the card holder face down.
- Replace the battery first.
- Replace the back cover.

- 6 -

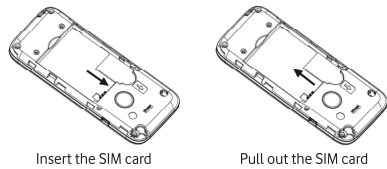

What is a SIM card?

Every mobile phone has a SIM card (Subscriber Identity Module). This is a micro-chip that holds your personal information such as names and phone numbers. Your phone won't work without it. If you already have contacts on your SIM card, they can be transferred in most cases.

How to charge the battery

Your phone is powered by a rechargeable battery. The battery needs to be charged for at least 6-8 hours before you can make your first call.

- Connect your travel adapter to the bottom of your mobile phone as shown in the diagram.
- Connect the other end of the travel adapter to the mains socket. **Note:** The side with arrow should be upright while connecting.
- If you are charging the battery when the mobile phone is switched off, the display will show the battery icon with the bars moving from right to left. If charging the battery when the mobile is switched on, the display will show the battery icon with a lightning strike.
- When the battery is fully charged, disconnect the charger.

- 7 -



Power on/ off your phone

Ensure that your SIM card is in your mobile phone and that the battery is charged.

Please hold End key to power on/off the phone. The phone will automatically search for the network.

Display information

Besides sending and receiving calls, you can also do:

- In the standby mode, press Left soft key to enter main Menu.
- In the standby mode, press Right soft key to view Messaging.
- In the standby mode, hold * key to turn the Torchlight on/off.
- Press Send key in standby mode to enter Call Menu.
- Press End key to exit to standby mode.
- You can customise the fastkey settings of 4-Way Navigation keys for standby mode.

Note: In this User Manual, "press a key" means to press the key and release it, while "hold a key" means to keep pressing the key.

- 8 -

Menu tree

1. Games	4.4 Silent	6.4 Define rest day
1.1 Tetris	4.5 Headset (appears only when headset is connected)	7. SIM
2. Call Menu	5. Messaging	8. Contacts
2.1 Calls	5.1 New message	9.1 Phone settings
2.2 Diverts	5.2 Inbox	9.2 Display settings
3. Tools	5.3 Sent folder	9.3 Clock settings
3.1 Calculator	5.4 Draftbox	9.4 Call settings
3.2 World clock	5.5 Msg settings	9.5 Fixed dialling number
3.3 Calendar	5.6 Voicemail	9.6 Service dialling number
3.4 Conversion	5.7 Cell info.	9.7 Network settings
3.5 Torchlight	6. Alarm	9.8 Security settings
4. Profiles	6.1 Set alarm	9.9 Factory settings
4.1 Normal	6.2 List alarms	
4.2 Meeting	6.3 Clear all	
4.3 Outdoor		

Writing text

- Change input mode: Press # key to change the input mode (input modes: Abc, abc, ABC, 123 and Eng).
- Input Letters: In Abc/abc/ABC mode, press the corresponding letter key till the letter appears.
- Input Words: In Eng mode, key in any letter with a single key press. Press each key only once for every letter. The word changes after each key stroke. When you have finished writing the word and it is correct, confirm it by pressing 0 key or Centre key. Pressing a Navigation key moves the cursor. Predictive text input is based on a built-in dictionary.

- 9 -

- Input Digits: In 123 mode, press digit key once to key in a digit. In Eng mode, press the digit key, and select the number by pressing a Navigation key. In Abc/abc/ABC mode, constantly press the digit key until the number appears.
- Input Symbol: Press * key to enter a symbol. In Abc/abc/ABC mode, constantly press 1 key till the required symbol (common symbols) appears.
- Selecting Template: Hold * key to open Templates. Select the required template.
- Input Space: Press 0 key to input space. It does not work in 123 mode.
- Delete Character: Press Right soft key to clear a character. Press and hold Right soft key to delete all characters and clear the display.
- Move Cursor to Left or Right: Press Left/Right navigation keys to move the cursor left or right.

How to add people to your Contacts

There are some phone numbers that you may want to call again and again so it makes sense to add these to your Contacts. You can then access these numbers quickly and easily.

- Select Menu then Contacts.
- Press Left soft key [Options], and then select Add new contact.
- Select whether to save the new contact to your SIM card or to the phone's memory.
- Enter the contact's phone number.

- 10 -

- Press Left soft key [OK], then enter a name and confirm by clicking Centre key.
- If Phone is selected to save new contact, you need also to select the group and then confirm by clicking Centre key. You can also save a number right after you've made or received a phone call or a text message from someone who is not yet in your Contacts list.
- To delete someone from your Contacts list, first select the name, then press Left soft key [Options] and choose Delete.

How to make and receive calls

The most basic way to make a call is to key in the number in the standby mode and press Send key. One advantage of a mobile phone is that you can also store people's names and numbers in your mobile Contacts and call them more easily. To call someone:

- Select Menu then [Contacts]. From here use the Up/Down keys to find the name of the person you want to call. You can also type in the first letter of the name of the person you want to call.
- Now simply press Send key.
- To receive call: Press Send key.
- To end the call: Press End key.

Make sure you are in an area with sufficient coverage to make calls. The strength of the network signal is indicated on top left corner of screen.

- 11 -

How to send and receive text messages

You can use your mobile phone to send and receive text messages.

- Go to Menu→Messaging→ New message.
- Write your message. For more information on writing, see section 'Writing text'.
- Press Left soft key [Options] and select Send to one to send the message to one person. To send to more than one person, select Send to contacts and select the names from the contact list. Select Send and save to send the message and save it to Sent folder. Select Save as draft to save it to Draftbox.
- Enter the recipient's phone number or select from Contacts if you have previously stored the person's number in it. Then select OK to send the message.

Upon receiving a message, the mobile phone indicates with ringtone, prompt, or a new message icon.

- Press Left soft key [Select] to open the new message. You can also go to Inbox to read the message.
- Use Up/Down keys to read the message.
- While the message is open, use Left soft key [Options] to reply, delete, or forward the message. You can also call back to the sender or extract the sender's number.

- 12 -

Menu functions

Function	Description	Selection
Recent calls	View all recent calls	Menu→Call Menu→Calls →All calls/Received calls /Dialled calls/Missed calls or select Send key from the standby mode
Divert calls	Divert the incoming calls to other preset numbers (need network support)	Menu→Call Menu→Diverts
Calculator	Execute basic mathematical calculation	Menu→Tools→Calculator
World Clock	Check time in major cities	Menu→Tools→World clock
Calendar	View a full-screen monthly calendar	Menu→Tools→Calendar
Conversion	Set the exchange rate and account foreign currency or vice versa	Menu→Tools→Conversion
Ringtone /Vibration	Set ringtone or vibration	Menu→Profiles→Select Profile (Normal/Meeting etc.) →Personalise →Ringtone/ Vibration
Send message	Send text messages to mobile phones	Menu→Messaging →New message
Read message	Read text messages (received, sent)	Menu→Messaging →Inbox/Sent folder /Draftbox

- 13 -

Function	Description	Selection
Templates	Preset messages to help to make Sending text messages easier and quicker	Menu→Messaging→Msg settings→Templates
Voicemail	Receive and listen to voice messages	Menu→Messaging→Voicemail→Get voicemail or hold 1 key to call voicemail
Alarm	Set alarm alert time	Menu→Alarm
Fastkey settings	Set the shortcuts for the navigation keys (Up/Down/Left/Right key)	Menu→Settings→Phone settings→Fastkey settings
Automatically lock keypad	Automatically lock the keypad after 2 minutes in standby mode	Menu→Settings→Phone settings→Auto lock keypad
Wallpaper	Select wallpaper for home screen	Menu→Settings→Display settings→Wallpaper
Clock settings	Set date and time	Menu→Settings→Clock settings→Date and Time
Any key answer	Press any key to answer an incoming call except End key and Right soft key	Menu→Settings→Call settings→Any key answer
Minute minder	Sound an alert tone ahead of every minute	Menu→Settings→Call settings→Minute minder
Connected minder	Sound an alert tone when a call is connected	Menu→Settings→Call settings→Connected minder
Call waiting	Hold the first call and answer the second call (need network support)	Menu→Settings→Call settings→Call waiting

- 14 -

Function	Description	Selection
Hide my number	Choose whether to show /hide my number when calling someone (need network support)	Menu→Settings→Call settings→Hide my number
Fixed dialling number	Phone numbers preset in the list can be dialled (need network support)	Menu→Settings→Fixed dialling number
Service dialling number	Phone numbers preset by network service provider can be dialed (need network support)	Menu→Settings→Service dialling number
Network settings	Set network searching mode	Menu→Settings→Network settings
Security settings	Access your phone's security settings * Default phone code is 1234	Menu→Settings→Security settings
Factory settings	Restore to original factory settings	Menu→Settings→Factory settings

- 15 -

Operating Machinery
Full attention must be given to operating the machinery in order to reduce the risk of an accident.
Product Handling
General Statement on Handling and Use
You alone are responsible for how you use your phone and any consequences of its use.
You must always switch off your phone wherever the use of a phone is prohibited. Use of your phone is subject to safety measures designed to protect users and their environment.
<ul style="list-style-type: none">Always treat your phone and its accessories with care and keep it in a clean and dust-free place.Do not expose your phone or its accessories to open flames or lit tobacco products.Do not expose your phone or its accessories to liquid, moisture or high humidity.Do not drop, throw or try to bend your phone or its accessories.Do not use harsh chemicals, cleaning solvents, or aerosols to clean the device or its accessories.Do not paint your phone or its accessories.Do not attempt to disassemble your phone or its accessories, only authorised personnel must do so.

- 16 -

<ul style="list-style-type: none">Do not expose your phone or its accessories to extreme temperatures, minimum - [5] and maximum + [50] degrees Celsius.Please check local regulations for disposal of electronic products.Do not carry your phone in your back pocket as it could break when you sit down.
Small Children
Do not leave your phone and its accessories within the reach of small children or allow them to play with it.
They could hurt themselves or others, or could accidentally damage the phone.
Your phone contains small parts with sharp edges that may cause an injury or which could become detached and create a choking hazard.
Demagnetisation
To avoid the risk of demagnetisation, do not allow electronic devices or magnetic media close to your phone for a long time.
Electrostatic discharge (ESD)
Do not touch the SIM card's metal connectors.
Antenna
Do not touch the antenna unnecessarily.

- 17 -

Normal Use Position
When placing or receiving a phone call, hold your phone to your ear, with the bottom towards your mouth.
Air Bags
Do not place a phone in the area over an air bag or in the air bag deployment area.
Store the phone safely before driving your vehicle.
Seizures/ Blackouts
The phone can produce a bright or flashing light.
Repetitive Motion Injuries
To minimize the risk of RSI when texting or playing games with your phone:
<ul style="list-style-type: none">Do not grip the phone too tightly.

- 18 -

<ul style="list-style-type: none">Press the buttons lightly.Use the special features which are designed to minimize the times of pressing buttons, such as Message Templates and Predictive Text.Take lots of breaks to stretch and relax.
Emergency Calls
This phone, like any wireless phone, operates using radio signals, which cannot guarantee connection in all conditions. Therefore, you must never rely solely on any wireless phone for emergency communications.
Loud Noise
This phone is capable of producing loud noises which may damage your hearing.
Bright Light
The phone can produce a flashing light, so it can be used as a torch. However, do not use it too close to the eyes.
Phone Heating
Your phone may become warm during charging and during normal use.

- 19 -

Electrical Safety
Accessories
Use only approved accessories.
Do not connect with incompatible products or accessories.
Take care not to touch or allow metal objects, such as coins or key rings, to contact or short-circuit in the battery terminals.
Connection to a Car
Seek professional advice when connecting a phone interface to the vehicle electrical system.
Faulty and Damaged Products
Do not attempt to disassemble the phone or its accessory.
Only qualified personnel must service or repair the phone or its accessory.
If your phone or its accessory has been submerged in water, punctured, or subjected to a severe fall, do not use it until you have taken it to be checked at an authorised service centre.
Interference
General Statement on Interface
Care must be taken when using the phone in close proximity to personal medical devices, such as pacemakers and hearing aids.

- 20 -

Pacemakers
Pacemaker manufacturers recommend that a minimum separation of 15 cm be maintained between a mobile phone and a pacemaker to avoid potential interference with the pacemaker. To achieve this, use the phone on the opposite ear to your pacemaker and do not carry it in a breast pocket.
Hearing Aids
People with hearing aids or other cochlear implants may experience interfering noises when using wireless devices or when one is nearby.
The level of interference will depend on the type of hearing device and the distance from the interference source, increasing the separation between them may reduce the interference. You may also consult your hearing aid manufacturer to discuss alternatives.
Medical Devices
Please consult your doctor and the device manufacturer to determine if operation of your phone may interfere with the operation of your medical device.
Hospitals
Switch off your wireless device when requested to do so in hospitals, clinics or health care facilities. These requests are designed to prevent possible interference with sensitive medical equipment.

- 21 -

Aircraft
Switch off your wireless device whenever you are instructed to do so by airport or airline staff.
Consult the airline staff about the use of wireless devices on board the aircraft, if your device offers a 'flight mode' this must be enabled prior to boarding an aircraft.
Interference in Cars
Please note that because of possible interference to electronic equipment, some vehicle manufacturers forbid the use of mobile phones in their vehicles unless a handsfree kit with an external antenna is included in the installation.
Explosive Environments
Petrol Stations and Explosive Atmospheres
In locations with potentially explosive atmospheres, obey all posted signs to turn off wireless devices such as your phone or other radio equipment.
Areas with potentially explosive atmospheres include fuelling areas, below decks on boats, fuel or chemical transfer or storage facilities, areas where the air contains chemicals or particles, such as grain, dust, or metal powders.
Blasting Caps and Areas
Turn off your mobile phone or wireless device when in a blasting area or in areas posted turn off "two-way radios" or "electronic devices" to avoid interfering with blasting operations.

- 22 -

Declaration of RoHS Compliance
To minimise the environmental impact and take more responsibility to the earth we live in, this document shall serve as formal declaration that the VODAFONE 236 manufactured by ZTE CORPORATION is in compliance with the Directive 2002/95/EC of the European Parliament - RoHS (Restriction of Hazardous Substances) with respect to the following substances:
(1) Lead (Pb)
(2) Mercury (Hg)
(3) Cadmium (Cd)
(4) Hexavalent Chromium (Cr (VI))
(5) Polybrominated biphenyls (PBB's)
(6) Polybrominated diphenyl ethers (PBDE's)
(Compliance is evidenced by written declaration from our suppliers, assuring that any potential trace contamination levels of the substances listed above are below the maximum level set by EU 2002/95/EC, or are exempt due to their application.)
The VODAFONE 236 manufactured by ZTE CORPORATION, meets the require-ments of EU 2002/95/EC.

- 23 -

Disposal of your old appliance
<ol style="list-style-type: none">When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the European Directive 2002/96/CE.All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.The correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health.
For this product's Recycling Manual based on WEEE directive, please send an email to weee@zte.com.cn, or visit the website below to download the document: http://ensupport.zte.com.cn

- 24 -

EC DECLARATION OF CONFORMITY

It is hereby declared that following designated product :

Product Type : GSM Dual-band Digital Mobile Phone

Model No. : Vodafone 236

Complies with the essential protection requirements of Low Voltage Directive (EC Directive 2006/95/EC), Electromagnetic Compatibility Directive (EC Directive 2004/108/EC), Radio and Telecommunication Terminal Equipment Directive (EC Directive 1999/05/EC) and their amendments.

This declaration applies to all specimens manufactured identical to the samples submitted for testing/evaluation.

Assessment of compliance of the product with the requirements relating to Low Voltage Directive (EC Directive 2006/95/EC), Electromagnetic Compatibility Directive (EC Directive 2004/108/EC) and the Radio and Telecommunication Terminal Equipment Directive (EC Directive 1999/05/EC) was performed by Germany EMCert. DR. RASEK GmbH (Notified Body No. 1588), based on the following standards :

Safety	EN60950-1:2006
EMC	EN301489-1 V1.8.1; EN301489-7 V1.3.1
Radio	EN301511 V9.0.2
Health	EN50361:2001; EN 62209-1:2006

- 25 -

This declaration is the responsibility of the manufacturer :	
ZTE Corporation	
ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China	
Authorised person signing for the company :	
Xu Feng	Quality Director of ZTE Corporation
<i>Name in block letters & position in the company</i>	
Shenzhen, 3 March, 2009	
<i>Place & date</i>	<i>Legally valid signature</i>

- 26 -

Notice
Copyright © 2009 ZTE CORPORATION
All Rights Reserved
Your Vodafone 236 refresh is made exclusively for Vodafone by ZTE CORPORATION.
No part of this manual may be reproduced or transmitted in any form or by any means without prior written consent of ZTE CORPORATION.
Trademarks
VODAFONE and the Vodafone logos are trademarks of the Vodafone Group.
Notice
The information in this manual is subject to change without notice. Every effort has been made in the preparation of this manual to ensure accuracy of the contents, but all statements, information, and recommendations in this manual do not constitute a warranty of any kind, expressed or implied. Please read the safety precautions carefully to ensure the correct and safe use of your mobile phone. For detailed information, refer to the section "Important Safety Precautions".
ZTE CORPORATION Address:
ZTE Plaza, Keji Road South, Hi-tech Industrial Park, Nanshan District, Shenzhen, P. R. China
Postal Code: 518057
Website: http://www.zte.com.cn
Release: V1.0.0
079584500029

- 27 -